



interior doors



KENTUCKY WHOLESale BUILDING PRODUCTS

# stock doors

## style options



**6 Panel**  
HC Smooth & Textured  
*Solid Core Smooth*  
(Colonist)



**4 Panel**  
HC Smooth  
(Coventry)



**2 Panel Roman**  
HC Smooth  
*Solid Core Smooth*  
(Caiman)



**2 Panel**  
HC Smooth  
*Solid Core Smooth*  
(Carrara)



**2 Panel Arch Top**  
HC Textured (Classique)  
HC Smooth (Cremona)



**Riverside**  
HC Smooth  
*Solid Core Smooth*



**Cheyenne**  
HC Smooth  
*Solid Core Smooth*



**3 Panel**  
HC Textured  
(Clermont)



**Winslow**  
(3 Panel Flat)  
HC and SC Smooth



**Lincoln Park**  
(1 Panel Flat)  
SC Smooth

Available  
March 16



**Logan**  
(2 Panel Flat)  
HC and SC  
Smooth



**Conmore**  
(5 Panel Flat)  
HC and SC Smooth



**Pantry**  
(Frosted Glass)  
PRM MDF



**M730**  
Full Louver  
(Pine or Primed)



**M102A**  
2 Panel Arch Top  
Pine



**M108**  
6 Panel Pine (pictured)  
6 Panel Knotty Pine



**M104**  
4 Panel  
Pine



**M125KP**  
2 Panel VG Arch-Top  
Knotty Pine



**M123KP**  
2 Panel VG  
Knotty Pine



**M1501**  
1 Lite  
(Pine or Primed)



**M1510/M1515**  
10 Lite & 15 Lite  
(Pine or Primed)

*Wood Doors: Special Order Lemieux wood doors available in many different styles and wood species. 3-4 weeks lead time.*

**NOTE:** Doors stocked in 6/8 (80") height. Special order 7/0 (84") and 8/0 (96") heights available in most styles. 2/8 & 3/0, 1 3/4" Solid Core Doors are available in most styles. Complimentary bifold doors are available in most styles.


# size options

| DOOR STYLE                                  | 1/0 | 1/2 | 1/3 | 1/4 | 1/6 | 1/8 | 1/10 | 2/0 | 2/2 | 2/4 | 2/6 | 2/8 | 2/10 | 3/0 | 2/8<br>SC 20MIN Label | 2/8<br>SC 20MIN Label |
|---|-----|-----|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|------|-----|-----------------------|-----------------------|
| 6 Panel Smooth HC                           | •   | •   | •   | •   | •   | •   | •    | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| 6 Panel Textured HC                         | •   | •   | •   | •   | •   | •   | •    | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| 6 Panel Smooth Solid Core                   | •   |     |     | •   | •   | •   |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| 4 Panel Smooth HC                           |     |     |     | •   | •   | •   | •    | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| 2 Panel Roman Smooth HC                     | •   | •   | •   | •   | •   | •   | •    | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| 2 Panel Roman Smooth Solid Core             |     |     |     | •   | •   | •   |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| 2 Panel Roman Smooth SC 8'                  |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| 2 Panel Smooth HC                           | •   | •   | •   | •   | •   | •   | •    | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| 2 Panel Smooth Solid Core                   |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| 2 Panel Smooth SC 8'                        |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| 2 Panel Arch--Top Smooth HC                 |     |     |     |     | •   | •   |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| 2 Panel Arch--Top Textured HC               | •   | •   |     | •   | •   | •   | •    | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Riverside 5 Panel Smooth HC                 |     |     |     | •   | •   |     | •    | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Riverside 5 Panel Smooth Solid Core         |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Riverside 5 Panel SC 8'                     |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| Cheyenne Smooth HC                          | •   | •   | •   | •   | •   | •   | •    | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Cheyenne Smooth Solid Core                  |     |     |     |     | •   | •   |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| 3 Panel Textured HC                         |     |     |     | •   | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| Winslow Flat Panel HC                       |     |     |     | •   | •   | •   | •    | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Winslow Flat Panel SC                       |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Lincoln Park SC                             |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Lincoln Park SC 8'                          |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Conmore HC                                  |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Conmore SC                                  |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Birch HC                                    |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   | •                     | •                     |
| Lauan HC                                    | •   |     |     | •   | •   | •   |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| M730 Full Louver                            |     |     |     |     | •   | •   |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| M108 6 Panel Pine                           | •   | •   | •   | •   | •   | •   | •    | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| M104 4 Panel Pine                           |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| M102A Pine 2 Panel Arch                     |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| M108KP 6 Panel Knotty Pine                  |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| M125KP 2 Panel VG Arch--<br>Top Knotty Pine |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| M123KP 2 Panel Knotty Pine                  |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| M1501 1 Lite Pine                           |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| M1510 5 & 10 Lite Pine                      |     |     |     |     | •   |     |      | •   |     |     |     |     |      |     |                       |                       |
| M1510 5 & 10 Lite Pine Primed               |     |     |     |     | •   |     |      | •   |     |     |     |     |      |     |                       |                       |
| M1515 15 Lite Pine                          |     |     |     |     |     |     |      |     | •   | •   | •   |     |      | •   |                       |                       |
| M1515 15 Lite Pine Primed                   |     |     |     |     |     |     |      |     | •   | •   | •   |     |      | •   |                       |                       |
| M1506/M1512/M1518 8' Primed                 |     |     |     |     | •   |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |
| Primed Pantry                               |     |     |     |     |     |     |      | •   | •   | •   | •   | •   | •    | •   |                       |                       |




# stock casing & base profiles

## casing profiles & sizes




Primed FJ & Clear WM356 - 2-1/4"




Primed FJ WM366 - 2-1/4"




Primed FJ KW150 - 2-3/4"




Primed FJ KW250 - 2-3/4"

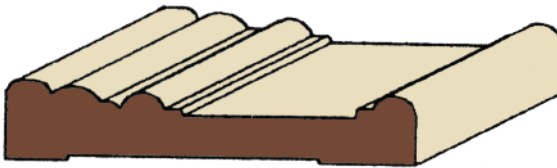

Primed FJ KW350 - 3-1/2"

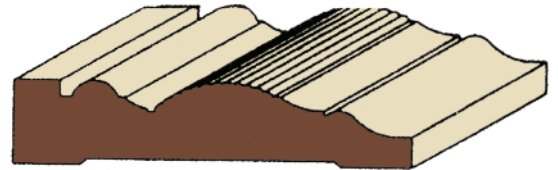


Primed FJ KW190 - 3-1/2"

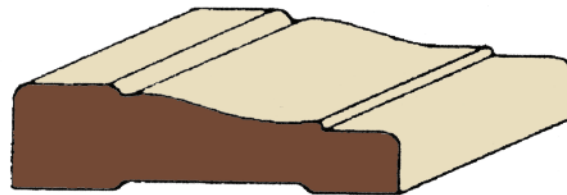


Primed WM444 - 3-1/4"



Primed KW275 - 2-3/4"

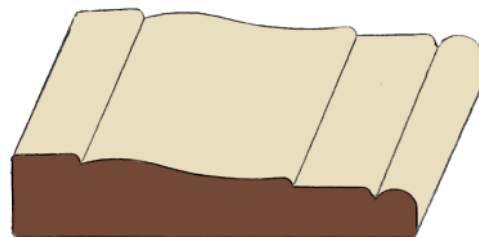

Primed WM445 - 3-1/4"

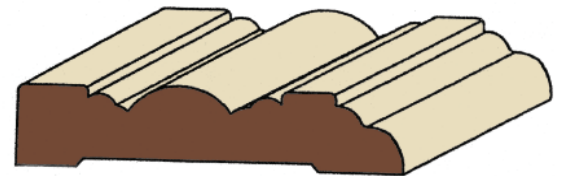

Primed KW300 - 3-1/2"



Primed 1x4 (23/32" x 3 1/2")


\*MDF Available in WM356



## prehung door options

- Split jambs from 4-9/16" to 6-9/16" in clear, and FJ primed
- Flat jambs with applied stop from 4-9/16" to 6-9/16" in clear or FJ primed
- Double rabbeted jambs 4-9/16" only in clear or primed pine

### PRIMED BASE PROFILES:

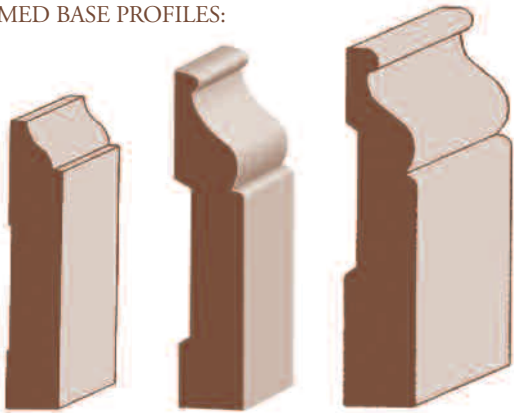

WM623 - 3-1/4"

KW840 - 4-1/4"

KW850 - 5-1/4"

### HINGE FINISHES AVAILABLE:

- (LB3) Light Brass
- (US15) (2CD) Satin Nickel
- (US10B) Oil Rubbed Bronze
- (26D) Brushed Chrome
- (US3) Bright Brass
- (ABA) Antique Brass
- (US26) Bright Chrome
- (AN) Antique Nickel

### CROWN MOULDING PROFILE



Available: 4 1/4" and 5 1/4"

## barn door hardware



### ACME SERIES:

#### BD102K-07800 BENT STRAP

- Track length 78-3/4"
- Use with one sliding door weighing up to 250 lbs.
  - Set includes all necessary tack and all hardware
- The maximum thickness of door must be 1-3/8"

### AVAILABLE FINISHES:

- Stainless Steel
- Matte Black
- Antique Bronze

# palazzo series®



## PALAZZO™ SERIES by Masonite®

### FEATURES

- Distinct raised moulding combined with unique, high-definition panel profiles
- Exceptionally smooth surface, ideal for painting and decorating
- Masonite's unique Engineered Component Construction—Core reinforcements are strategically positioned throughout the door in the stiles, rails and panels to maximize performance, designed to have the weight\*, feel and richness of stile & rail wood doors, along with the performance benefits of a composite wood product.
- Three architectural designs available in both 1-3/8" and 1-3/4" doors
- Also available with a 20-minute fire rating
- United States Patent #6,588,162, other patents pending

*Note: Core reinforcements are made from composite wood substrates.*

*\*Weight comparison is based on matching or exceeding the weight of a domestic pine, stile & rail, 2 panel wood door.*

*Note: Special order, non-stock, allow additional lead time*



**Bellagio®**  
2 arched panels



**Capri®**  
2 square panels



**Treviso®**  
3 panel  
camber-top



# core construction & installation

**STILE**  
(1 1/8")  
• FW, Fibre Wood

**RAIL**  
(1 1/8", 2 3/8")  
• FW, Fibre

**LOCK BLOCKS**  
• Flush; 16"x2 5/8"  
on Center  
• 6 Panel; 6"x2 5/8"  
on Cross Rails  
• Other Molded;  
8"x2 5/8"

**safe'n sound**  
EMERALD® SOLID CORE MOLDED PANEL DOORS

**1-3/8" thickness**

Answering the call for a "Green" sound-reducing interior door, comes the environmentally responsible Safe'N Sound, manufactured with DorCor™, an essential ingredient in making this product "Green." DorCor is a low density fiberboard made from wheat straw, an annually renewable, agricultural, wheat by-product.

Note: 1 3/8" Solid Core Doors feature 27 lb. particleboard core. All Stile and Rail dimensions are before trim.

## recommended installation instructions for pre-hung doors

- The rough opening should be at least 1" wider and 1/2" higher than the outside dimensions of the new door frame unit.
- Ensure that the opening is level and plumb.
- Slide the new door unit into the rough opening bottom end first and tilt it into place. Position the door unit in the rough opening so the edges of the jambs are flush with the wallboard.
- Visually center the top jamb in the opening and making sure the hinge side jamb is plumb.
- Level the top jamb and tack it in place using two 4d finishing nails driven partway through the frame and into the header.
- Check the base of the frame to make sure it will fit with the finish flooring. If the finish floor has been installed, the jamb should fit snugly, but not so tight that it bows the frame. If the finish floor has not been installed, measure and mark each side of the frame from the sub floor 1/2" (depending on the thickness of the carpet and pad, tile, or wood floor) and 3/16" for vinyl floor covering. Note: if the thickness of the floor coverings in the adjoining rooms is different, mark and cut each side of the jambs accordingly to accommodate the materials. (e. vinyl in one room and tile the adjoining room).
- Holding a level along the hinge jamb, drive pairs of wood shims from opposite directions into the space between the jamb and the stud at each hinge point.
- Drive an 8d finishing nail through the jamb, shims, and partway into the stud at each hinge point. Check for plumb and adjust as necessary.
- Close door and drive an additional pair of shims in the space between the jamb and the stud at the lockset and then near the top and bottom of the jamb. Check the jamb for plumb.
- After ensuring that the frame is level and plumb, drive pairs of shims along the side and top jambs so they are spaced every 12". Make sure not to bow the jambs.
- Drive an 8d finishing nail through the jamb and each pair of shims into the stud.
- With a handsaw or utility knife, cut the shims just below the wall surface.
- Position the trim assembly without nailing it. Carefully measure and mark it to match the depth of the floor coverings as with the door frame.
- Remove, cut, and smooth the end cut with sandpaper. Reposition trim and tack in place with 4d finishing nails. Align the trim and nail in place every 16 inches with 4d finishing nails using a nail set to drive nails just below the surface of the wood.

## recommended painting instructions for molded panel doors

- Apply top coat in the order as shown, starting with the beading around the panels ensuring to catch any runs, then coat the panels themselves with smooth strokes of the brush again following the grain of the wood.
- Next, paint the vertical stiles with smooth vertical strokes following the grain of the door.
- Then coat the horizontal rails using horizontal strokes with the brush.
- Now coat the vertical runs using smooth vertical strokes with the brush, ensuring to leave an even finish where the joints of the horizontal rails meet.
- Finally, coat the edges of the door (F) with smooth vertical strokes, ensuring to catch any runs or build ups of paint on the corners.
- Allow to dry and then rub down the door with fine sandpaper, wipe the door down with a clean cloth to remove any dust, and then apply the second coat in the same manner.



At Kentucky Wholesale we offer a wide range of oak stair fittings and treads as well as primed and iron balusters. Our standard and custom stair components are available in white oak, poplar, black walnut as well as other species and we have 1 to 2 week lead times.

## KENTUCKY WHOLESALE BUILDING PRODUCTS

954 Delaware Avenue | P.O. Box 2120 | Lexington, KY 40587-0886  
859.233.7447 | 1-800-282-9064 | Fax 859.255.5962



*Printed December 2015*